

# ENDCAPE GENERATORS

## Technical Data Sheet

Generator Model: EP1360A



**Made in Britain**



Frequency	Prime		Standby	
Hz	kVA	kWe	kVA	kWe
50	1360	1088	1500	1200.0

### Technical Data Perkins 4012-46TWG3A

Performance		Units	Perkins 4012-46TWG3A	
			Prime	Standby
	Engine Speed	r/min.	1500	
	Gross Power	kWm	1200	1314
	Mechanical Losses	kWm	51	51
	Net Power	kWm	1149	1263

General	Cylinders/Type	-	12 Cylinder / 60°Vee / 4 Stroke	
	Aspiration	-	Turbocharged	
	Governing Type	-	Electronic	
	Governor Accuracy	%	±0.25%	
	Bore x Stroke	mm	160 x 190	
	Cubic Capacity	litres	45.482	

Fuel	Fuel consumption at standby 110% load	litres/h	315	
	Fuel consumption at 100% load	litres/h	281	
	Fuel consumption at 75% load	litres/h	224	
	Fuel consumption at 50% load	litres/h	212	

Air Flow	Engine (combustion) air flow	m <sup>3</sup> /min.	108	114
	Cooling air flow	m <sup>3</sup> /min.	1680	

Exhaust	Exhaust Gas Flow	m <sup>3</sup> /min.	182	182
	Exhaust Gas Temperature	°C	474	474
	Maximum exhaust back pressure	kPa	0.5	

Cooling	Coolant capacity	litres	196	
	Maximum coolant temperature	°C	98	
	Fan Type	-	Pusher Fan	


Oil	Engine Capacity	litres	177	
	Oil Type	-	API-CG4/CH4	

## Technical Data - Continued

<b>Alternator</b>	Voltage	V	400/230
	Phase	-	3
	Frequency	Hz	50
	Power Factor	p.f.	0.8
	Insulation	-	Class H
	Voltage regulation	-	±1.0%

## Dimensions & Weights

Set Type	Open	Canopy
Length (mm):	4730	Cont
Width (mm):	1980	Cont
Height (mm):	2450	Cont
Weight (kg):	9000	N/A

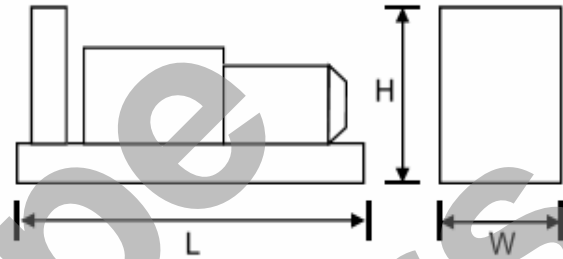

## Standard Control System

Endcape recommend and fit Deep Sea Electronics control units to all of their generator sets, these are configured Autostart as standard, and can be setup as AMF as an optional extra.

### Key Features:

- Large easy to read display.
- 3 phase mains & generator voltage sensing.
- Generator load power monitoring (kW, kV A, kV Ar, pf).
- Configurable inputs & outputs
- Low oil pressure, high temperature & engine speed protection
- Voltage, current & load protections
- Load Transfer switch control (AMF configuration only).
- Configurable display languages.
- Comprehensive warning, electrical trip & shutdown protections, and fault logging



## Open Generator Scope

<b>Cooling System</b>	Set mounted with Engine driven pusher type fan. Radiator matrix & fan guarding as standard
<b>Base Frame</b>	Manufactured steel base including day tank for sets up to 700kVA. 800kVA and above base tank is optional extra
<b>General Arrangement</b>	Engine & alternator directly coupled, similar to automotive engine/gearbox, and isolated from steel base via rubber anti-vibration mounts.
<b>Circuit Breaker</b>	Set mounted 3 pole MCCB type housed in manufactured steel & powder coated enclosure.
<b>Exhaust System</b>	Engine fitted with flexible section and flange/adaptor to suit industrial grade silencer (supplied).
<b>Testing</b>	Engine & alternator load tested, and full functionality test to control system prior to despatch

## Acoustic Enclosure (Optional) Features



Typical Sound Level  
67dB(A) @ 7m

- Powder coated steel construction
- High quality corrosion resistant door gear
- Integral fuel tank - bund optional
- Internal secure fill point
- Fitted silencer
- Control panel viewing window
- High density acoustic lining
- Control panel viewing window

## Available Options

- Engine Heaters** Typically used on backup systems an engine pre heater warms the coolant jacket water circuit, which in turn will improve the starting performance, and load acceptance of the generator after start-up. A pre heater will also minimise the emissions on engine
- Anti Condensation Heaters** Installed within backup generator systems, these prevent a build up of moisture and condensation within the alternator when the set is in standby mode
- Battery Charger** An intelligent battery charging system, which monitors and trickle charges the engine starting batteries when the engine is not running. This needs to be connected to a mains auxiliary supply, and is recommended for backup and standby generator installati
- Transfer Switch** For mains failure installations, a transfer switch allows the user to select the supply from either the utility or the generator without having to disconnect & reconnect cables. On automated systems, these are controlled by the generator controller, and during an outage the signal to start the generator, transfer the load to the generator for the duration of the power cut, and return to the mains when the supply resumes is fully automated.
- Fuel Control System** An automated system which will replenish the generator base fuel tank, from a bulk supply, when the level drops to a predetermined level.
- ISO Containers** For larger generators where a close fitting acoustic enclosure is not available, Endcape can install the generator into an acoustically treated 20ft or 40ft container, providing a secure modular power box.

## Definition of ratings and test conditions (unless otherwise stated):

Prime Power (PRP) is the nominal output continuously available, where the average load (variable) does not exceed 70% of the prime power rating. 10% overload is available for a maximum of 1 hour in 12 hours of operation.

Standby rating (LTP) is at variable load, limited to 500 hours usage per year. No overload is permitted.